




Plastic Modular Belt

Series **uni CPB** Type **20% Rough**

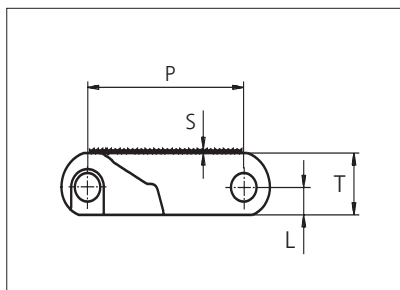

Straight running belt
Nominal pitch: 50.8 mm (2.00 in)
Surface type: Rough Top
Surface opening: 20%
Backflex radius: 85.0 mm (3.30 in)
Pin diameter: 8.0 mm (0.31 in)

Belt material & color	POM-NL 		mm	in		mm	in
		P (Nominal)	50.8	2.00	S	1.0	0.04
Pin material & color	 PA6.6 	L	8.0	0.31	T	18.0	0.71

Non standard material and color: See uni Material and Color Overview.
Alternative pin and lock systems and materials: Contact Customer Service.

Belt width		Permissible tensile force (Belt/pin material)		Belt weight (Belt/pin material)		*Min. No. drive sprocket per shaft	Number of wear strips (Min. No.)	
		POM-NL / PA6.6		POM-NL / PA6.6			**Carry (pcs)	**Return (pcs)
mm	in	N	lbf	kg/m	lb/ft			
151	5.9	7852	1765	2.5	1.68	2	2	2
202	8.0	10504	2361	3.4	2.25	2	2	2
252	9.9	13104	2946	4.2	2.81	2	2	2
302	11.9	15704	3530	5.0	3.37	3	3	2
352	13.9	18304	4115	5.8	3.93	3	3	2
403	15.9	20956	4711	6.7	4.50	3	3	2
453	17.8	23556	5295	7.5	5.05	4	4	2
503	19.8	26156	5880	8.3	5.61	4	4	2
553	21.8	28756	6464	9.2	6.17	4	4	2
604	23.8	31408	7061	10.0	6.74	5	5	3
654	25.7	34008	7645	10.9	7.30	5	5	3
704	27.7	36608	8229	11.7	7.85	5	5	3
754	29.7	39208	8814	12.5	8.41	6	6	3

Additional standard belt widths are available in steps of 50.3 mm (1.98 in). Additional non-standard belt widths are available in steps of mm 16.8 (0.66 in).

1961	77.2	101972	22923	32.6	21.88	14	14	7
------	------	--------	-------	------	-------	----	----	---

Additional standard belt widths are available in steps of 50.3 mm (1.98 in). Additional non-standard belt widths are available in steps of mm 16.8 (0.66 in).

2966	116.8	154232	34671	49.2	33.09	20	20	10
------	-------	--------	-------	------	-------	----	----	----

General belt tolerance is +0/-0.4% at 23°C/73°F and 50% RH. For exact belt width contact Customer Service. Non standard belt width on request.


*Max. Load per Drive Sprocket. Belt material: POM-NL 2500 N (560 lbf). PP 2500 N (560 lbf).

**Max. Spacing between wear strips. Carry: 152.0 mm (6.00 in); Return: 304.0 mm (12.00 in).

 = Single Link

Accessories

Rubber Top

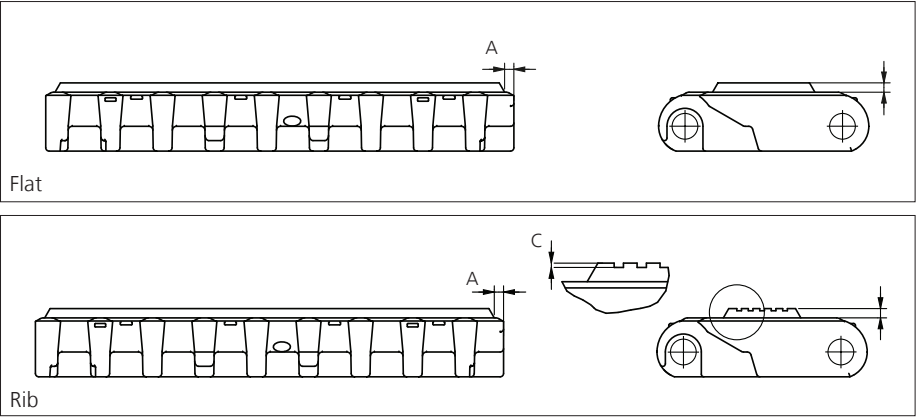


Type	Belt material & color	Rubber material & color	A		B		C		Link size	Width	
			mm	in	mm	in	mm	in		mm	in
Flat	POM-NL K	09 K	2.5	0.09	3.0	0.12	0.7	0.02	K600	150.5	5.93
Rib											

The color of standard rubber material is black. However, as it is hardly possible to see black rubber on black links, the links are illustrated with rubber in color natural. Other Non Standard Rubber profiles: See uni Rubber Profile Overview.

Accessories

Flight

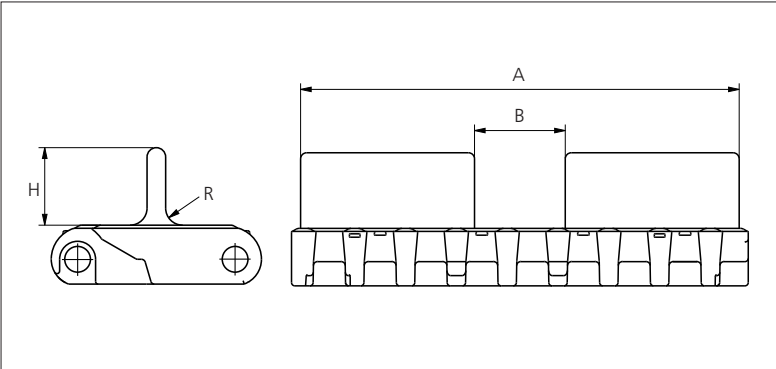

Type	Material & color	H		R		A		B		Link size	Width		Indent	
		mm	in	mm	in	mm	in	mm	in		mm	in	mm	in
Flat	POM-NL K	25.0	0.98	5.5	0.22	145.0	5.70	30.0	1.18	K600	150.5	5.93	2.8	0.11

Non Standard material and color: See uni Material and Color Overview.

Accessories

Top/Bottom Insert NON STANDARD




The thread inserts allow for easy attachment of fixturers to the belt.

Available insert size M5 + M6.

Depending on the size and shape of the attachment, attention should be paid as to how it will influence on the backflex radius of the belt.

Accessories

Non Standard uni AmFlight

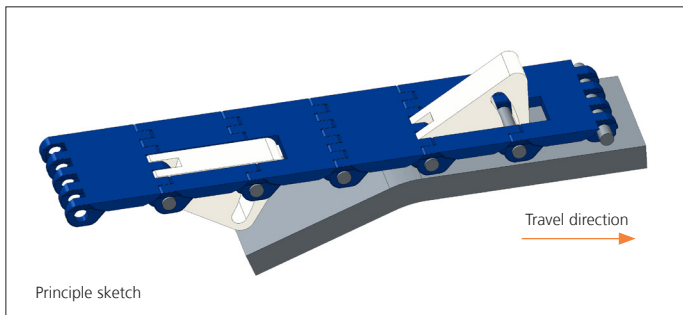


Sprocket

No of teeth	Bore size													Overall diameter		Pitch diameter		Hub diameter		Dimension A*		Dimension B		Single row/One way	Double row/Two way	Molded	Machined	LG	N
	Pilot bore	in	0.75	0.78	0.98	1.00	1.18	1.25	1.50	1.57	2.36	2.50	3.54																
														mm	19.1	20.0	25.0	25.4	30.0	31.8	38.1	40.0	60.0						
Z08	x					●	●	●	■	■				132.9	5.23	132.8	5.23	70.0	2.75	53.3	2.10	76.5	3.00	x	x	x			
Z10	x						●	●	■	■				166.3	6.55	164.4	6.47	70.0	2.75	70.2	2.76	92.4	3.64	x	x	x			
Z10											■	■		166.3	6.55	164.4	6.47	120.0	4.72	70.2	2.76	92.4	3.64	x	x	x			
Z12	x						●	●	■	■				198.6	7.82	196.3	7.73	70.0	2.75	86.8	3.42	108.5	4.27	x	x	x			
Z12											■	■		198.6	7.82	196.3	7.73	120.0	4.72	86.8	3.42	108.5	4.27	x	x	x			
Z16							●	●	■	■				263.8	10.39	260.4	10.25	150.0	5.90	119.7	4.71	140.8	5.54	x	x	x			
Z16	x						●	●	■	■				263.8	10.39	260.4	10.25	150.0	5.90	119.7	4.71	138.7	5.46	x			x		


*A-dimension for automotive applications use A = (B-16.0 mm/0.63 in).

Non standard material and color: See uni Material and Color Overview.


Molded sprocket



Molded sprocket





Molded sprocket




Molded sprocket




Molded sprocket

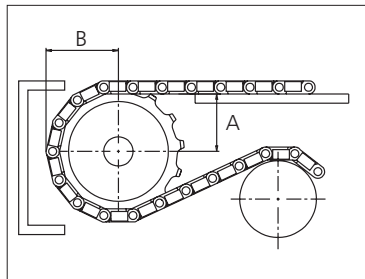

Machined sprocket



Machined sprocket



Other sprocket sizes are available upon request.

Two-part sprocket are available upon request.

Round bores are always delivered with keyway.

Other bore sizes are available upon request.

uni Retainer Rings: See uni Retainer Ring data sheet

Width of sprocket = Single row: 42.3 mm (1.66 in)

Double row: 50.0 mm (1.96 in)

Width of tooth = Single row: 9.5 mm (0.37 in)

Double row: 17.0 mm (0.66 in)

Max load per sprocket shown does not take bore size into account.

Please also ensure that sufficient size shaft is chosen for corresponding load.

For correct sprocket position: See uni Assembly Instructions for uni CPB.

For more detailed sprocket information. contact Customer Service.

uni CPB 20% Rough/2023.12.12



The local partner of choice for sustainable conveyor belting solutions – around the globe.

<http://eptool.online>

Member of Ammega Group.



Scan the QR code and find your local contact

Ammeraal Beltech Modular

Hjølsmagervej 21
DK-7100 Vejle
T +45 7572 3100

<http://eptool.online>

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.