



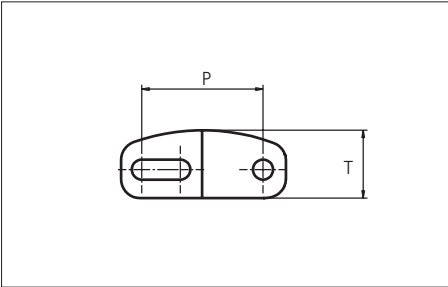

Plastic Modular Belt

Series **uni Flex ASB** Type **43% Open Curved Surface (Radius 2.2)**

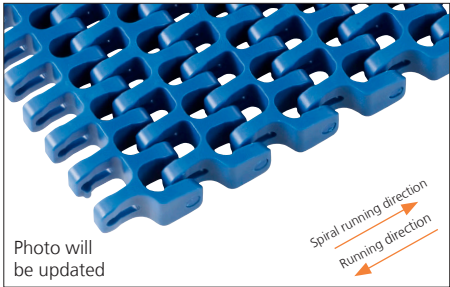

Sideflexing belt
Nominal pitch: 25.4 mm (1.00 in)
Surface type: Curved Surface
Surface opening: 43%
Backflex radius: 25.0 mm (0.98 in)
Pin diameter: 4.0 mm (0.16 in)
Min. inside radius: 2.2 x belt width

Belt material & color	POM-D W B		mm	in
		P (Nominal)	25.4	1.00
Pin and lock material & color	PA6.6 B	T	14.2	0.56

Non standard material and color: See uni Material and Color Overview.
Alternative pin and lock systems and materials: Contact Customer Service.

Belt width		Permissible tensile force (Belt/pin material)				Belt weight (Belt/pin material)		*Min. No. drive sprocket per shaft	Number of wear strips (Min. No.)	
		POM-D/PA6.6				POM-D/PA6.6			**Carry (pcs)	**Return (pcs)
		Straight sections		Curve sections						
mm	in	N	lbf	N	lbf	kg/m	lb/ft			
149	5.9	2801	630	1200	270	1.2	0.83	2	2	2
226	8.9	4249	955	1200	270	1.9	1.26	2	2	2
302	11.9	5678	1276	1200	270	2.5	1.68	3	3	2
379	14.9	7125	1602	1200	270	3.1	2.11	3	3	2
455	17.9	8554	1923	1200	270	3.8	2.54	5	4	2
531	20.9	9983	2244	1600	360	4.4	2.96	5	4	2
608	23.9	11430	2570	1600	360	5.0	3.39	5	5	3
684	26.9	12859	2891	2040	459	5.7	3.82	5	5	3
761	30.0	14307	3216	2040	459	6.3	4.24	7	6	3
837	33.0	15736	3537	2040	459	6.9	4.67	7	6	3
914	36.0	17183	3863	2040	459	7.6	5.10	7	7	4
990	39.0	18612	4184	2040	459	8.2	5.52	7	7	4

Additional standard belt widths are available in steps of 76.4 mm (3.01 in). Additional non-standard belt widths are available in steps of 12.7 mm (0.50 in).

1449	57.0	27241	6124	2040	459	11.9	7.99	11	10	5
------	------	-------	------	------	-----	------	------	----	----	---

Additional standard belt widths are available in steps of 76.4 mm (3.01 in). Additional non-standard belt widths are available in steps of 12.7 mm (0.50 in).

1984	78.1	37299	8385	2040	459	16.3	10.93	15	14	7
------	------	-------	------	------	-----	------	-------	----	----	---

General belt tolerance is +0/-0.4% at 23°C/73°F. For exact belt width contact Customer Service. Non standard belt width on request.
*Max. Load per Drive Sprocket. Belt material: POM-D 2000 N (450 lbf).
**Max. Spacing between wear strips, Carry: 152.0 mm (6.00 in); Return: 304.0 mm (12.00 in).
 = Single Link



STANDARD

SIDE FLEXING

PITCH 25.4 MM/1.00 IN

Accessories

Bottom Tab


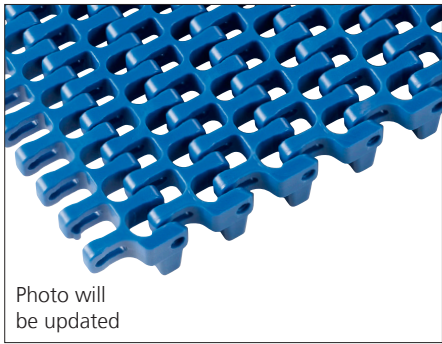



Photo will be updated

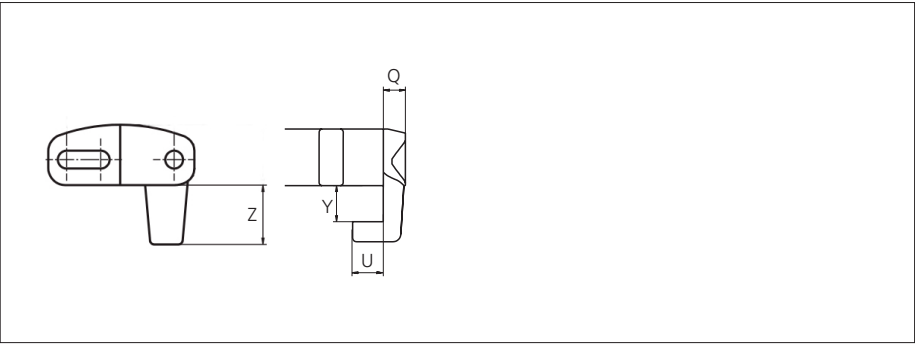

Type	Tab Material & color	Q		U		Y		Z	
		mm	in	mm	in	mm	in	mm	in
Bottom Tab	POM-D B W	5.5	0.22	7.5	0.30	9.0	0.35	14.0	0.55

Non Standard material and color: See uni Material and Color Overview.

Design Guidelines

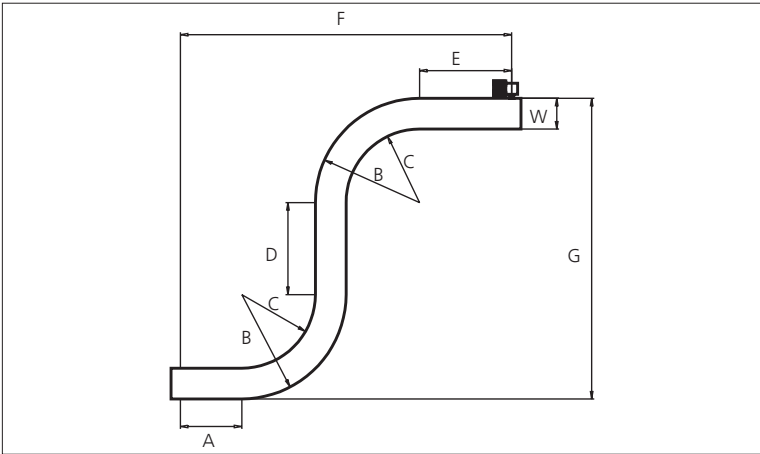

For min. conveyor dimensions please refer to sketch and diagram.

	uni Flex ASB Curved Surface R2.2
A	min. 1.5 x W
B	min. 3.2 x W
C	min. 2.2 x W
D	min. 2.0 x W
E	min. 2.0 x W
F	min. 8.9 x W
G	min. 8.4 x W

Accessories

Side Guard



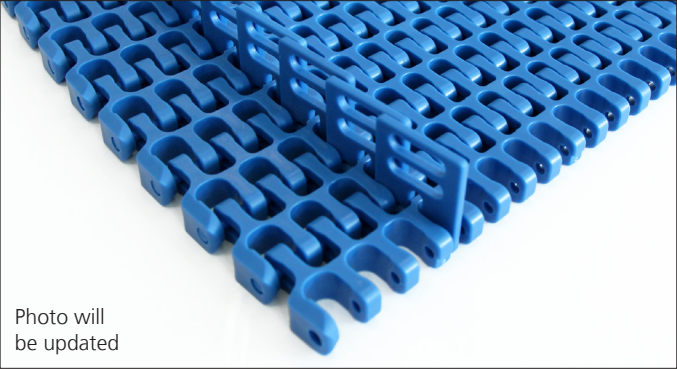


Photo will be updated

Side Guard Open

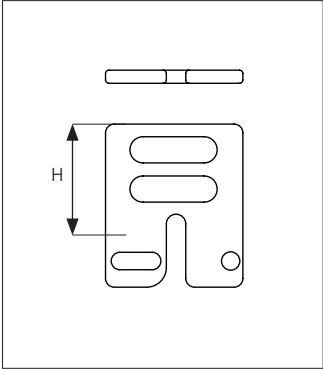

Side Guard Closed

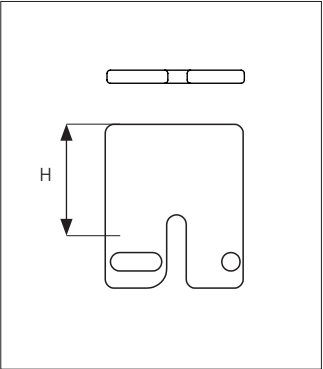

Type	Side Guard Material & color	H	
		mm	in
Side Guard Closed	POM-D B	10.0 25.4	0.39 1.00
Side Guard Open	POM-D B	25.4	1.00



Min. indent for Side Guard is: 44.0 mm (1.73 in) and Increment 12.7 mm (0.50 in).
Non Standard material and color: See uni Material and Color Overview.

Sprocket

No. of teeth	Bore size										Overall diameter		Pitch diameter		Hub diameter		Dimension A		Dimension B		Double row/Two way	PA6 N Machined
	Pilot Bore	in	0.79	0.98	1.00	1.18	1.25	1.50	1.57	2.36												
	mm	20.0	25.0	25.4	30.0	31.8	38.1	40.0	60.0	mm	in	mm	in	mm	in	mm	in	mm	in			
Z07	✔		●	●	●					58.0	2.28	58.5	2.30	40.8	1.61	20.4	0.80	35.2	1.39	✔	✔	
Z09	✔			● ■	● ■	●	●			75.0	2.95	74.3	2.93	57.8	2.28	28.9	1.14	43.1	1.70	✔	✔	
Z12	✔			● ■	●	●	●	■		100.0	3.94	98.1	3.86	82.8	3.26	41.4	1.63	55.1	2.17	✔	✔	
Z15	✔				●	●	●	■	● ■	124.6	4.91	122.2	4.81	107.4	4.23	53.8	2.12	67.1	2.64	✔	✔	
Z18	✔					●	●	● ■	● ■	149.3	5.88	146.3	5.76	132.1	5.20	66.0	2.60	79.2	3.12	✔	✔	

■ Machined sprocket

● Machined sprocket



Other sprocket sizes are available upon request.

Other bore sizes on sprockets are available upon request.

Round bores are always delivered with keyway.

Max. load per sprocket shown does not take bore size into account.

Please also ensure that sufficient size shaft is chosen for corresponding load.

Width of tooth = Single row + double row: 7.0 mm (0.28 in)


Width of One-part sprocket = Double row: 30.0 mm (1.18 in)

uni UltraClean One-Part and Two-Part Sprocket

No. of teeth	Bore size		Overall diameter		Pitch-diameter		Hub-diameter		Dimension A		Dimension B		Single row/Two way	Moulded	PA6 W
	in	1.57													
	mm	40.0	mm	in	mm	in	mm	in	mm	in	mm	in			
Z12	■		100.0	3.94	98.1	3.86	80.0	3.15	41.4	1.63	55.1	2.17	✓	✓	
Z15	■	■	124.6	4.91	122.2	4.81	80.0	3.15	53.8	2.12	67.1	2.64	✓	✓	
Z18	■		149.3	5.88	146.3	5.76	80.0	3.15	66.0	2.60	79.2	3.12	✓	✓	

■ Moulded uni UltraClean OnePart Sprocket

■ Moulded uni UltraClean TwoPart Sprocket

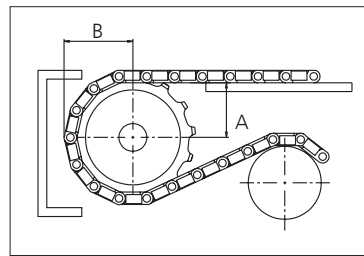

Width of UltraClean Two-part sprocket = Single row: 44.0 mm (1.73 in)

Width of UltraClean Two-part tooth = Single double row: 7.0 mm (0.28 in)

uni Retainer Rings: See uni Retainer Ring data sheet.

For correct sprocket position: See uni Assembly Instructions for uni Flex ASB.

For more detailed sprocket information, contact Customer Service.



The local partner of choice for sustainable conveyor belting solutions – around the globe.

<http://eptool.online>

Member of Ammega Group.



Scan the QR code and find your local contact

Ammeraal Beltech Modular
Hjølmevej 21
DK-7100 Vejle
T +45 7572 3100

<http://eptool.online>